TOPSIDE UNITS

Imenco develop and produce a wide variety of Topside Systems and Products. Through our wide range of in-house engineering disciplines we continuously develop new products to the world market.

imenco.com

SMART UTILITY STATION

Our SMART Utility Stations are designed and manufactured on both standard requirements and special needs from clients. Our Standard SMART Utility Stations have provision for HP hot water, fresh water and Plant Air.

Hose reels will normally be installed inside the enclosure to protect hoses from wear and tear from harsh environmental conditions. For stations operating in sub-zero temperatures, our Smart Utility Stations will have an installed EX rated heater in the cabinet and heat tracing on the tubing. Complete Smart Utility Stations are built in SS316L with offshore aluminum enclosures.

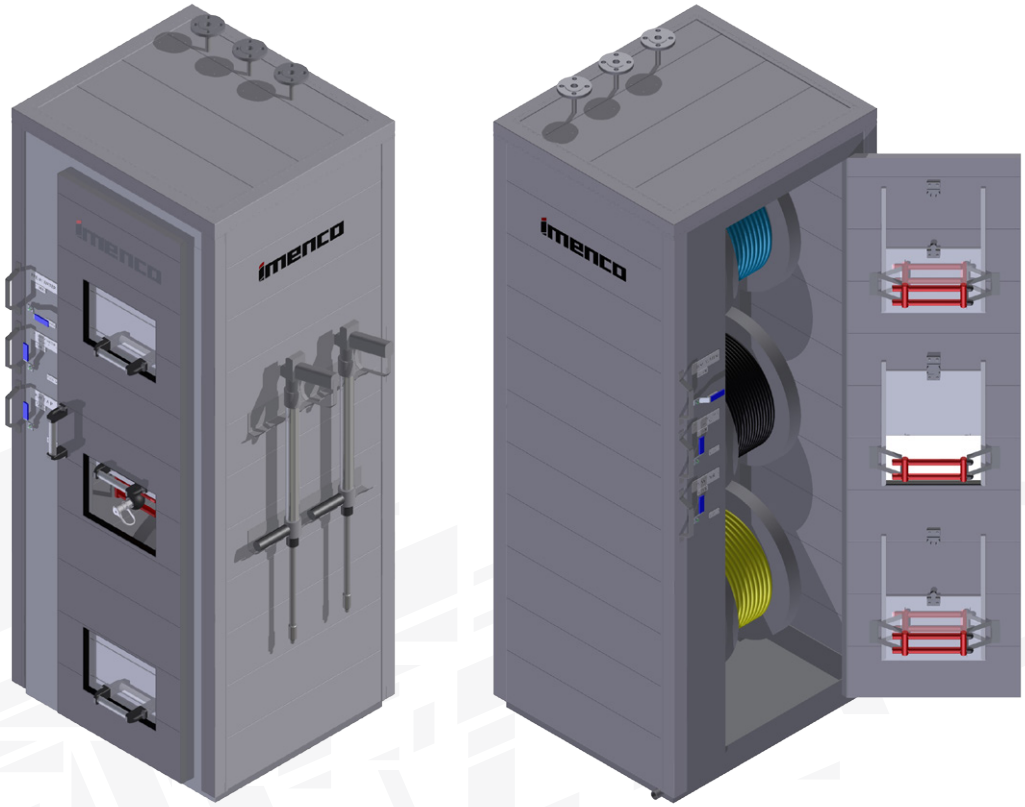

For further information email **topside@imenco.com**

imenco SMART SOLUTIONS

Contact us for additional information or to get a quotation. Send an email to topside@imenco.com or find personal contact info on our website.

imenco.com

TOPSIDE UNITS

BENEFITS

- Less weight and space
- Lower cost
- Better quality
- Easier and safer operation
- Easier maintenance
- Longer lifetime
- For any climate

DESIGN

- 6MO, Duplex, SS316L
- Tubing, Welded pipe
- Design pressure 20-300 Barg
- Design temp -40 to +85C
- SS316 Drip pan
- ATEX/IECEX for zone 1
- Light weight insulated alu enclosure

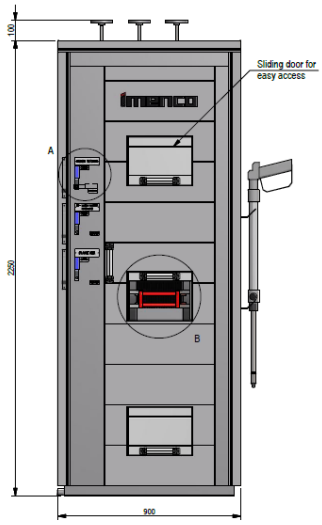

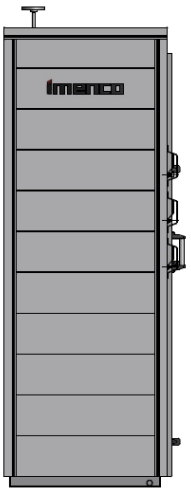





WEIGHT AND DIMENSIONS

Model	Weight (WET/DRY) (kg)	W/L/H (mm)	Reel 1 Fresh water	Reel 2 Hot water	Reel 3 Air	Options
IUS1-23-20	500/530	900/800/2250	20 m ¾" 20 barg	20 m ½" 250 barg	20 m ¾" 20 barg	Nitrogen Diesel Electrical interfaces

For further information email **topside@imenco.com**

Achilles®
DNV
NORWEGIAN ACCREDITATION QUAL 002
ISO 9001 CERTIFIED COMPANY