

Work boat Refueling station



They are designed and manufactured as a standard product, which can easily be adapted / modified

The Standard Refueling Stations have tank capacities of either 1000 or 2000 liter and a flow rate at 50 - 100 liters/min.

Our Work Boat Refueling Stations are designed and manufactured as a standard product, which can easily be adapted / modified to meet any special requirements of the individual Client.




Work boat Refueling station

Benefits

- Small footprint
- Oneskid installation
- High material quality
- Easy and safe operation
- Easy maintenance
- 25 year lifetime
- For any climate, heating available

Design

- Material: SS316L
- Complete filtration
- Piping to NORSOK AS300 specification
- Design temp -40 to +85C
- SS316 Drip pan
- EX approved controll panel, 24-230V
- Weather protecting alu. enclosure

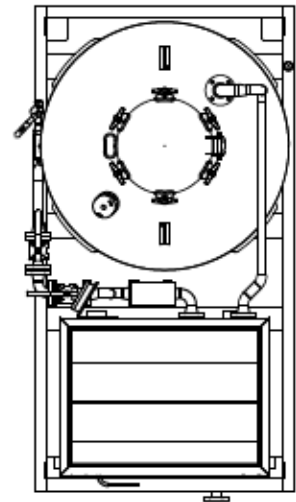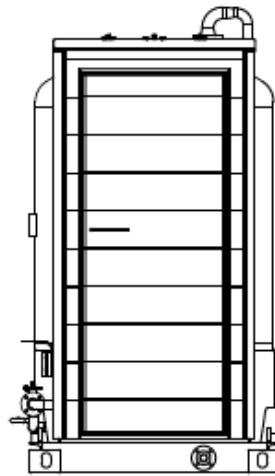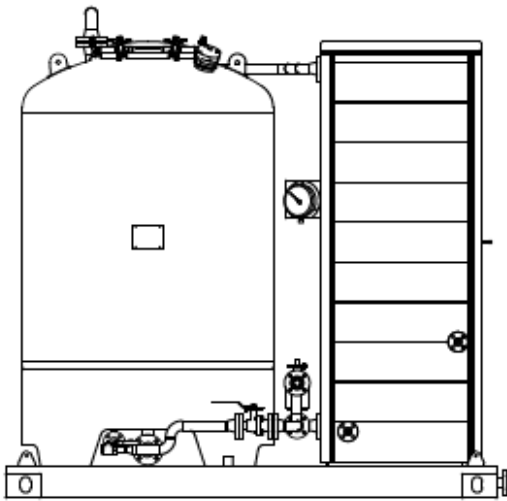

Weight and Dimensions

Model	Weight (kg) Dry/Wet	L (mm)	W (mm)	H (mm)
IWRS1000-25-30	1200/2800	2400	1320	2500
IWRS2000-25-30	1400/3000	2500	1320	2500