

IMENCO 20ft Subsea Basket

The 20ft Subsea Basket is used for safe and efficient transport of equipment to and from subsea locations. We have standard baskets built to stock and inhouse capabilities to design, engineer and produce tailor made baskets to clients needs and specifications.

Technical Specifications

Basket certified by DNVGL to relevant rules.
Defined as: DNVGL-ST-E273 POU type A, operational class R60-S03

Materials

Basket Structure : S355 Type Steel
Floor Grating : Hot Dip Galvanized Steel
Wall Grating : GRP

Surface Treatment


Steel Structure : Painted Yellow (RAL 1004)
Norsok M-501, System 1



For further information email commercial@imenco.com

Contact us for additional information or to get a quotation. Send an email to commercial@imenco.com or find personal contact info on our website.

imenco.com

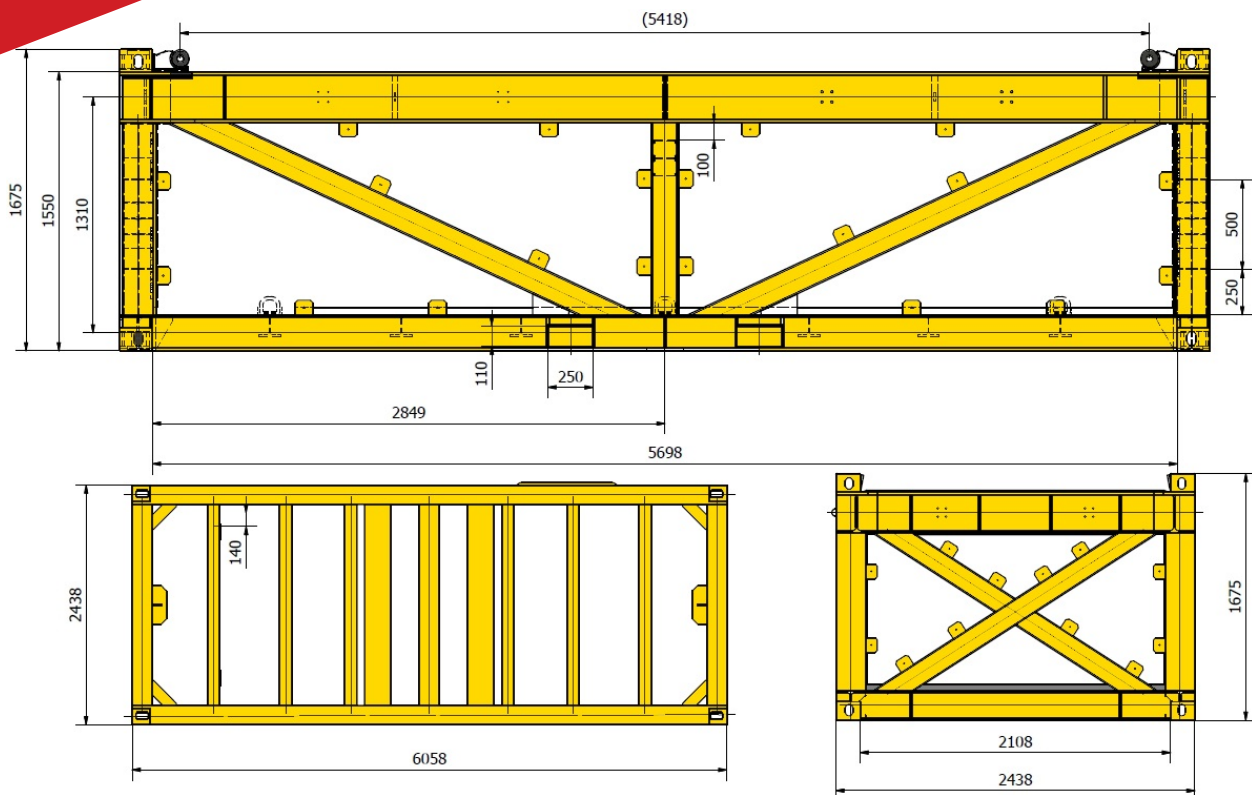

Main Dimensions

Tare	4 850 kgs (Theoretical mass)	
Payload	20 000 kgs	
Max Dynamic Factor	2	
Max Significant Wave Height	Hs = 3m	
Tare	25 000 kgs	
Outside dim. – W x D x H	2438 x 6058 x 1675 mm	
Inside dim. – W x D x H	1878 x 5498 x 1350 mm (without grating installed)	
Location of COG of load (Relative to center)	Longitudinal direction	+/-0,6m
	Transversal direction	+/-0,25m
	Vertical direction	max. 1,5m over deck

For further information visit www.imenco.com

