


Orstad

3! \*

529

529

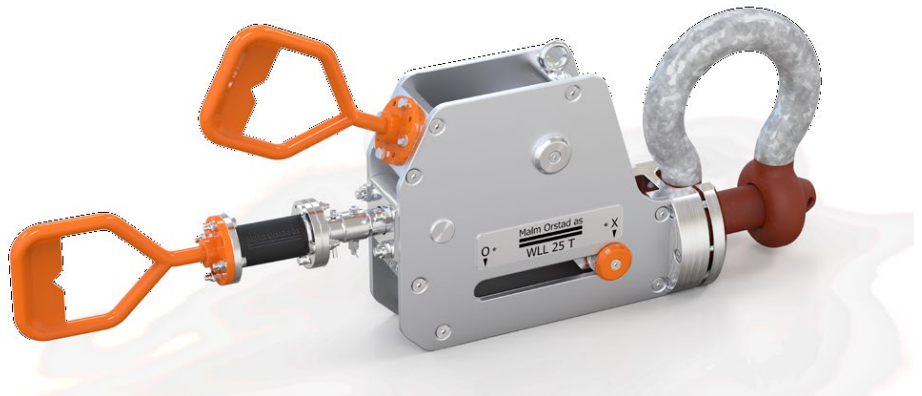

5RE  
R  
P  
W

529  
W

W

Contact us for additional information or to get a quotation. Send an email to [commercial@imenco.no](mailto:commercial@imenco.no) or find personal contact info on our website.

[imenco.no](http://imenco.no)

## Advantages

- Certified according to DNV 2.22 - Lifting Appliances.
- Easy operation with ROV manipulator.
- As a standard shackle is used, it fits standard lifting ears / pad eyes for the specific size.
- Used successfully in many subsea installations.
- Can be delivered with both D-handle and Fishtail handle.
- Rigging point for correct levelling of ROV shackle.
- High operating max. torque.
- Corrosion resistant construction.

## Technical information

- Shackle size: 12 to 120 ton.
- Calculated and certified in accordance with DNV 2.22.
- Fabricated in accordance with ISO 13628-8.
- CE marked.
- ROV or diver operated.
- Operation torque: 100 Nm.
- Design torque: 200 Nm.

## Dimension table

GA Drawing	WLL (T <sub>e</sub> )	Type and handle	Overall Dimensions (L x H x W) in mm	Safety Bolt diam. (mm)	Pad eye max. hole diameter (mm)	Pad eye width (mm)		Number of turns to open/close (-)	Max operational torque (Nm)	Weigth in air (kg)	Weigth in water (kg)
						Min	Max				
MO115847	12	D-Handle	820x358x124	35	37	41	49	~23	100	27	23,5
MO115915		Fishtail	875x392x124								
MO116149	25	D-Handle	928x394x150	50	53	58	70	~31	100	42	36
MO116153		Fishtail	987x425x150								
MO115548	35	D-Handle	960x404x170	57	60,5	65	79	~34	100	50	43
MO115642		Fishtail	1015x435x170								
MO116160	55	D-Handle	1133x518x210	70	74	82,5	100	~44	100	96	83
MO116166		Fishtail	1187x549x210								
MO115595	85	D-Handle	1198x538x230	83	88	100	120,5	~51	100	122,5	105,5
MO115643		Fishtail	1255x549x230								
MO115962	120	D-Handle	1287x627x280	95	100,5	116	139,5	~58	100	209	181
MO115992		Fishtail	1342x661x280								

For further information visit

[imenco.no](http://imenco.no)